

Coating Removal

PCD Remover (Based on Poly Crystalline diamond)

PCD brazed diamond tool technology

Rapidly remove epoxy and acrylic paint or adhesive coated on surface of concrete or stone



Professional type(#20001)



Turbo Type(#20007)



PCD + GMB Surfacer(#2010)

Type	Diameter	Bore	Features	Remarks
Professional	4" (Ø100)	Ø22.23- 7/8" M14 5/8"-11 M16	Removing coated epoxy surface	
	5" (Ø125)			
	6" (Ø150)			
	7" (Ø180)			
Ultra	4" (Ø100)		1) Extreme removal capacity and thickest coatings (Paint, epoxy and adhesive) 2) Cooling itself by vane design (Pending Patent)	
	5" (Ø125)			
	6" (Ø150)			
	7" (Ø180)			
PCD + GMB Surfacer	4" (Ø100)		1) Extremely fast removing coated epoxy, lacquer or adhesive 2) Cooling itself by vane design (Pending Patent) 3) Grinding depth adjustable by GMB base	
	5" (Ø125)			
	6" (Ø150)			
	7" (Ø180)			

Grinding Cup wheel for hand Grinder

ConLeveler

Grinding and shaping stone and concrete surfaces

Aggressive stock removal at exceptionally fast cutting rate



Ultra Type



Professional type

Diameter	Grits	Connection	Remarks
4" (Ø100)	Coarse Medium Fine	Bore (Ø22.23- 7/8") M14 5/8"-11 M16	
5" (Ø125)			
6" (Ø150)			
7" (Ø180)			

Concrete Floor Grinding system

ConPro - H for heavy machines



Extremely aggressive cutting speed and long life

Grinding segments separated by 3 different formulations based on concrete harnesses




Concrete	Soft	Medium	Hard	Remarks
Metal	#30	#30	#16	Different Colours on each grit
			#30	
	#60	#60	#60	
	#140	#140	#140	
Colour	Black	Blue	Red	

Quick Magnetic Chnager of Conpro-H by magnetic



Fan Metal & Resin Wet

For Terrazzo or Concrete Floor

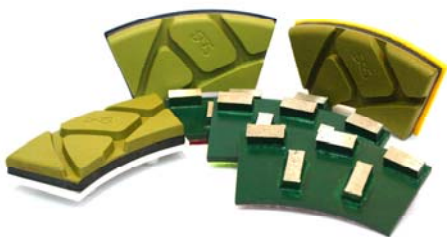

Diameter	Bond	Grits	Remarks
L110 / L75	Metal	#16 #30 #50 #100	
	Resin	#60 #120 #220 #500 #1000 #1800 #3500	



Welcome custom-designed-pattern

DS (Dongsin) DiAFLX Korea / www.diaflx.com / diaflx@diaflx.com

Concrete Floor Polishing System

Roulette

for heavy machines



Diameter	Bond	Grit	Attachment	Remarks
Ø60 Ø100	Metal	#30, #50, #100, #200	Velcro	Dry or Wet
Ø60	Resin	#50 #100 #200 #400 #800 #1500 #3000		

ConPro - R

for light machines

For concrete, stone as marble, granite or Terrazzo floor

Rounded edge for uneven floor or lippage.



Metal or Copper



GMB or Resin


Diameter	Bond	Grits	Remarks
3.5" (Ø90)	Metal	#50 #100 #200	Metal #50 Copper #10-#200 Resin #400-#800- #1500-#3000
	Copper	#100 ~ #400	
	Resin	#100 ~ #3000	
	Metal	#50 #100 #200	Metal #50 GMB #10-#200 Resin #3 - #4 - #5 - #6
	GMB	#100 #200	
	Epoxy	#1 #2 #3 #4 #5 #6 SS	

ConPro - S for heavy or light machines

For concrete, stone as marble, granite or Terrazzo floor

Custom-designed-pattern Available

Unique design with large water channels



ConPro-P



ConPro-E



Diameter	Type(Bond)	T	Grits	Remarks
Ø60	P	12.0mm	#1 #2 #3 #4 #5 #6 SS	Dry or Wet
Ø75	E			

Welcome custom-designed-pattern

DS (Dongsin) DiAFLX Korea / www.diaflx.com / diaflx@diaflx.com

Floor Polishing System




Conquer-wet



Type	Diameter	Bond	Grits	Thickness	Remarks
Wet type	4"(Ø100)	Resin	#1 #2 #3 #4 #5 #6 SS	4.5mm	H&L
	5"(Ø125)			2.6mm	
Dry type	4"(Ø100)	Epoxy	#1 #2 #3 #4 #5 #6 SS	4.5mm	H&L
	5"(Ø125)			2.6mm	

GMB - C for concrete


GMB - coarse metal grain inside for grinding concrete floor aggressively.

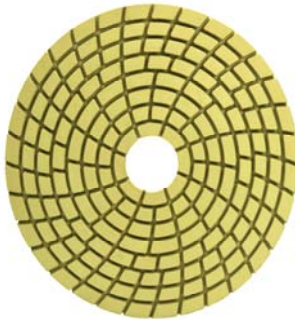

Diameter	Bond	Grits	Thickness	Remarks
Ø100(4")	GMB + Resin	#01 #02 #03	3.0mm	Wet

Hawkeye

2011 New ~

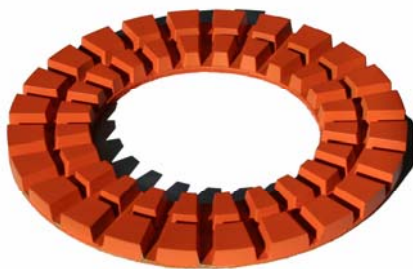

Diameter	Bond	Grits	Thickness	Remarks
8"(Ø200)	Resin	#100 #200 #400 #800 #1500 #3000 SS	12.0mm	H&L
10"(Ø250)				



Welcome custom-designed-pattern

DS (Dongsin) DiAFLX Korea / www.diaflx.com / diaflx@diaflx.com

